AL DAR
FOUNDATIONS AND CONTRACTING CO.
الدار للأساسات و المقاولات

Al Dar Foundations & Contracting Co.

Darak from Concept to Creation

Index

02 INDEX

03 Brife

04 CFA Operation Process

05 Bored Piles Operation Process

06 Organization Chart

07 Our Expertise

09 The Most Important Project

10 Compression load test method statement

14 Equipment List

15 Project Photos

17 HSE Plan

20 Quality Plan

22 Offical Documents& Certificates

AL DAR FOUNDATIONS AND CONTRACTING CO.
الدار للأساسات والمقاولات
Dorak from Concept to Creation

Brife




Al Dar Foundations & contracting co. is one of construction companies in Egyptian market.


Al Dar has entered the market on 2018 with strong start in Foundations field since the founders have long term in piling & shoring work.

Al Dar aims to be one of great companies in Egypt with distinct footprint.


CFA Operation Process

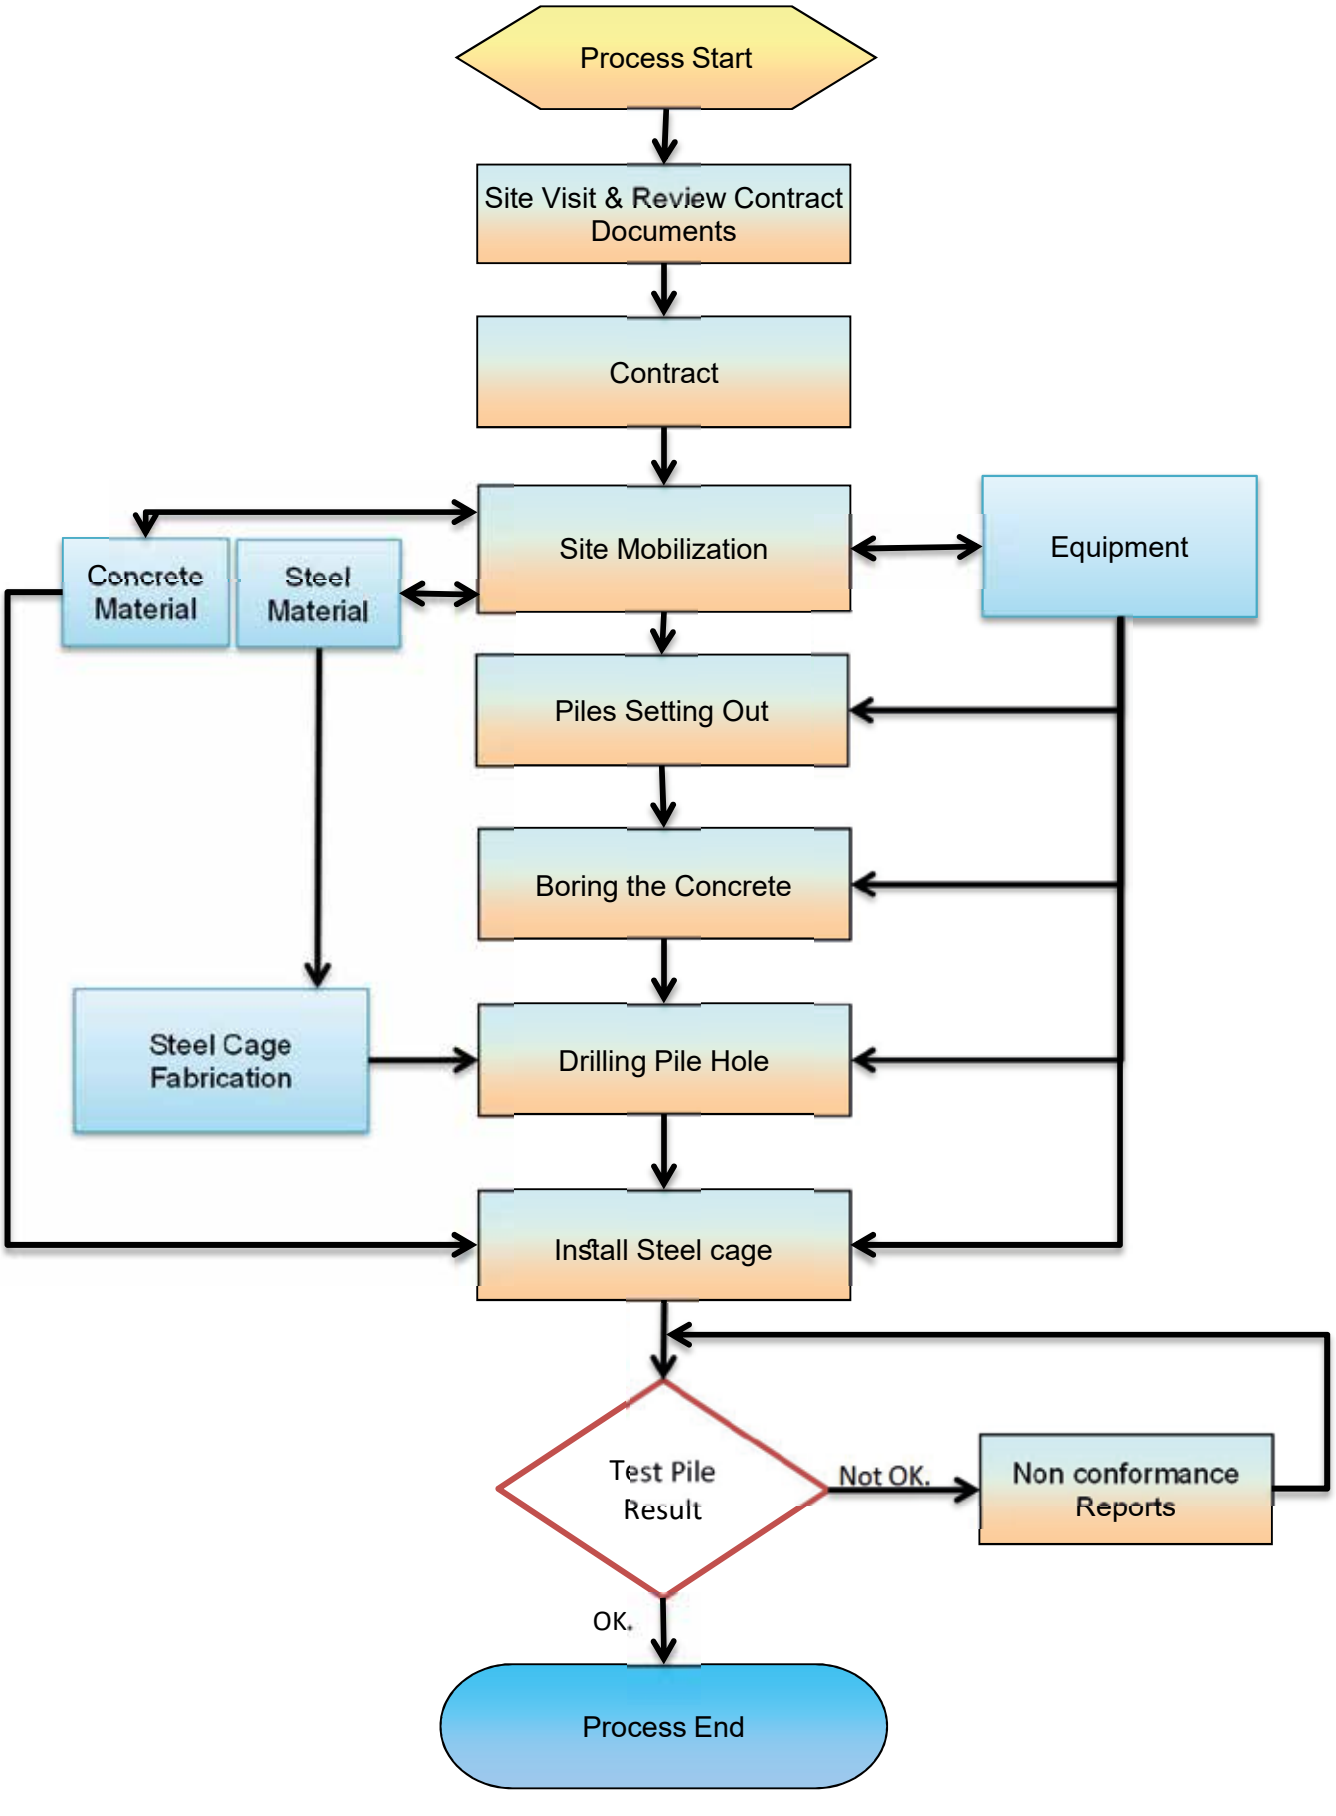

Bored Piles Operation Process

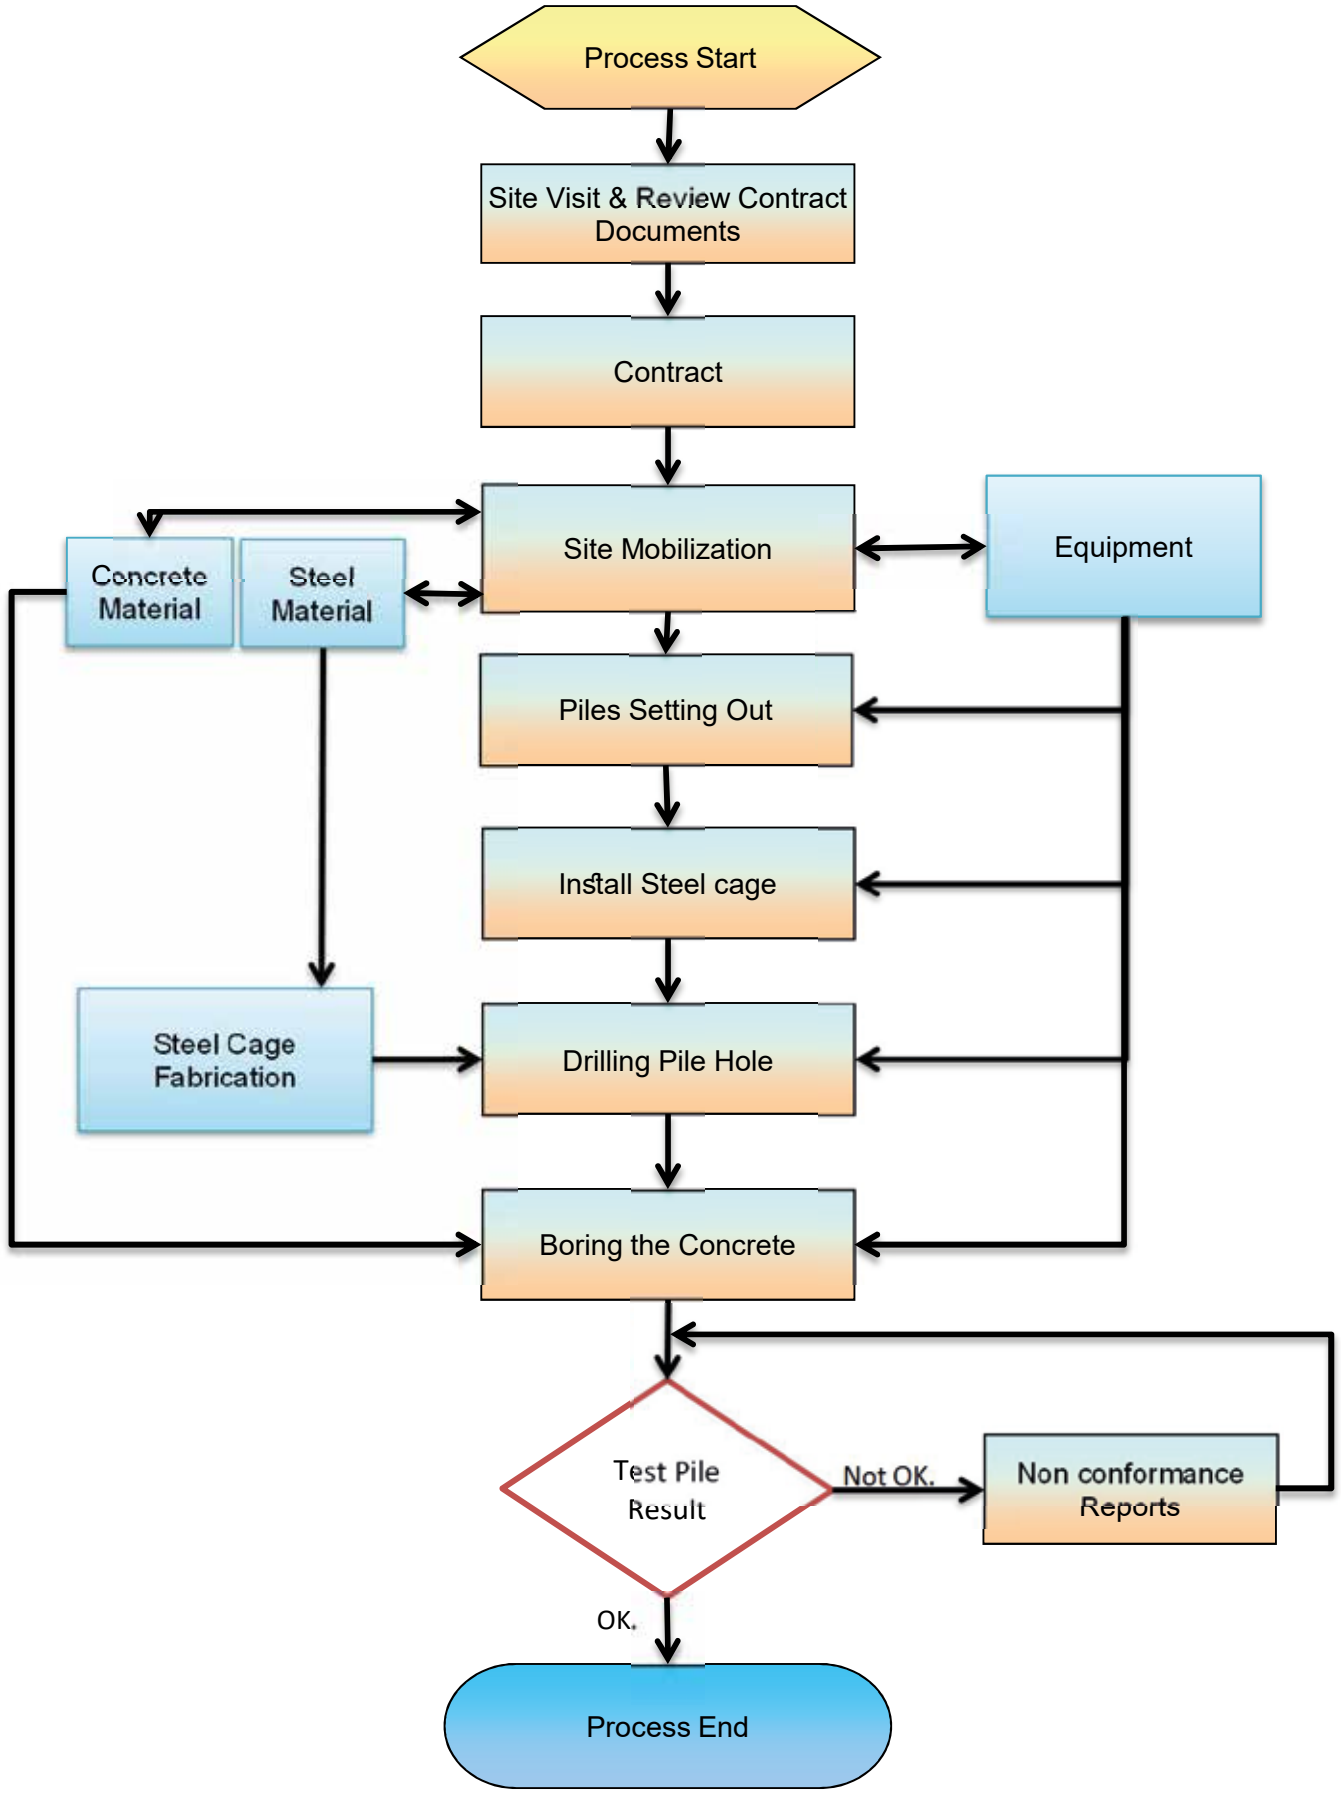

Organization Chart

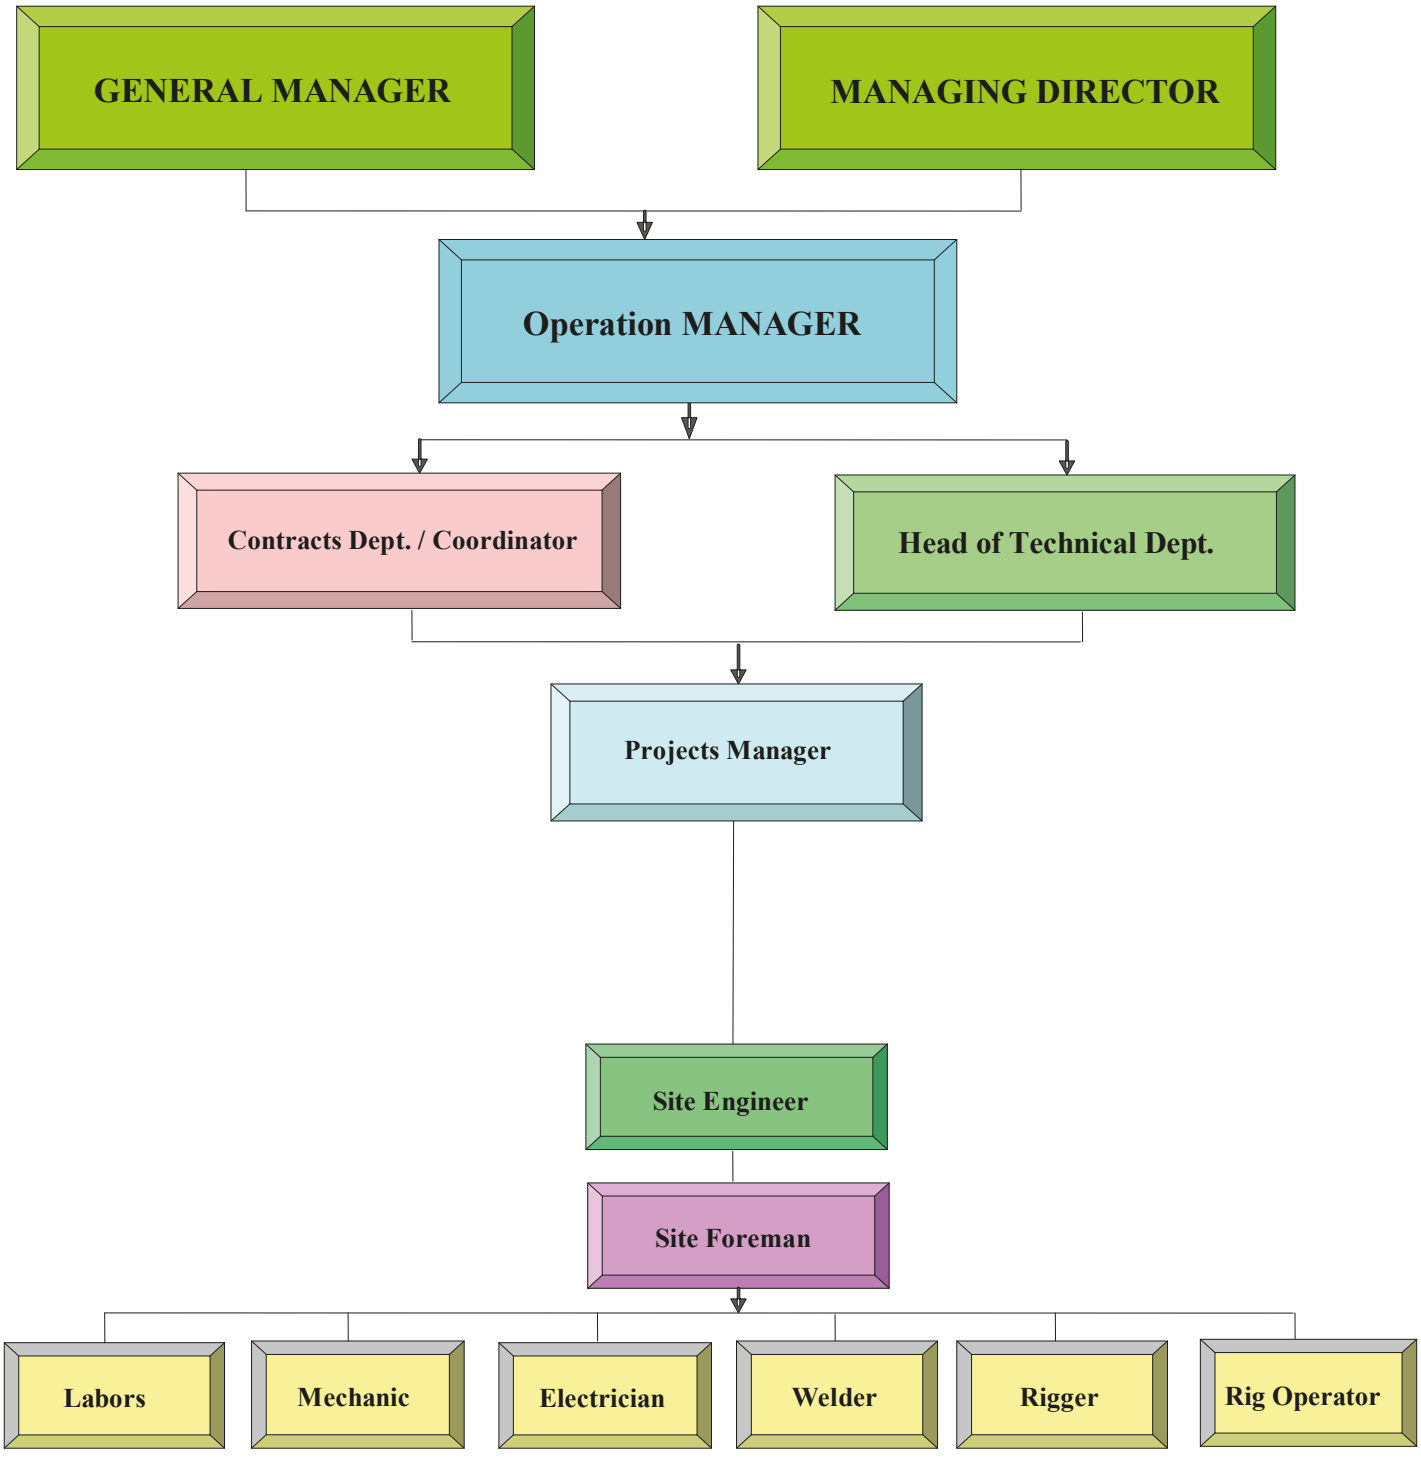

Our Expertise

1- Rotary Drilling Piles

Piling is a type of soil treatment, which is required when the soil bearing capacity is not sufficient for the structure to with stand. This is due to soil conditions, type of loads on foundations & conditions at the site.

Piles transfer the loads from structure to the hard layers that the ground is able to support the load of the structure.

Rotary Drilling Piles can be applied onshore and offshore for structures crossing waterways

There are different types of Rotary Drilling Piles such as:

- Bored Piles
- CFA Piles
- Full cased piles
- Micro piles



2 - Shoring systems

Shoring is process of supporting a building, structure or trench with shores when a danger of collapse or during repairs.
The main purpose of this type of work is to facilitate the construction bellow the ground level. When we need to execute new building with basement, we have to support the adjacent and the existing buildings, infrastructures, trenches roads.
The problem of providing stable retaining structures close to existing buildings or constructing watertight excavations can be solved in a number of different ways.

Now there are different types of shoring systems such as:

- Secant piles / cased secant piles
- Contiguous / Tangent piles
- Soldier piles / Berlin wall
- Sheet piles
- Soil nailing

In case we need to execute deep excavation we have to use long pile or other types of shoring systems with very long cantilever that's we can use alternative types of shoring supports over waler beams such as:
-1 Tie back anchors
-2 Strut System



3- Pile Testing

For a safe foundation to perform as desired the ultimate strength of each pile must fulfill both structural and geotechnical limits.
Some pile load tests are a direct method of determining the ultimate geotechnical capacity of a pile. It can be happen with either dynamic test or static test.
The dynamic test is faster than the static test but both methods have the same advantage for evaluating the bearing capacity of the pile.
Another purpose of pile Testing is to insure a sound concrete section of the pile to avoid any probability of failure.
There are different types of pile testing such as:

- Static Load Test
 - Compression load test (up to 4000 tons with crown or reaction piles systems)
 - Tension load Test
 - Lateral load Test
- Dynamic load Test
- Piles Integrity Tests
- UltraSonic Test





The Most Important Project

المشروع	المقاول الرئيسي	مواصفات المشروع	عدد الخوازيق	قيمة التعاقد
كوبري أبوسليمان الإسكندرية	شركة رودس للمقاولات	تنفيذ خوازيق حفر دوار بقطر 80 سم عمق 40 م وتسليح 25 T 18 م	150	1,185,178
سند جوانب حمام سباحة الأولمبي بنادي القطامية القاهرة	شركة ديفاين	تنفيذ خوازيق C.F.A بقطر 60 سم وعمق 13 م متداخلة وتسليح 18 T 16 م	300	756,300
عمارات سكنية كفر الشيخ	مالك خاص	تنفيذ خوازيق C.F.A بقطر 60 سم عمق 18 م وتسليح 16 T 10 م	172	215,000
ممشى أهل مصر القاهرة	شركة إيجي دريل	تنفيذ خوازيق C.F.A بقطر 50 سم عمق 18 م وتسليح 16 T 8 م	150	521,181
سند جوانب طريق بنها ميت غمر القليوبية	السلام انترناشيونال للطرق والكباري	تنفيذ خوازيق C.F.A بقطر 60 سم عمق 16 م تسليح 18 T 12 م	1800	2,759,680
2 كوبري مشاة بمصر الجديدة القاهرة	شركة السلام انترناشيونال وشركة المشروعات	تنفيذ خوازيق C.F.A بقطر 60 سم عمق 18 م تسليح 18 T 16 م	40	415,000
2 بلوك (بشاير الخير 4) رشيد	شركة الناغي للمقاولات العمومية	تنفيذ خوازيق C.F.A بقطر 60 سم عمق من 37-26 م تسليح 18 T 8 م	524	1,200,000
عمارات سكنية سرايا المنتزة (الباركو) الإسكندرية	شركة السرايا للعقارات	تنفيذ خوازيق C.F.A بقطر 60 سم عمق 37 م تسليح 18 T 8 م	120	470,000
مشروع مصنع غزل المحله	شركة جاما للمقاولات	تنفيذ خوازيق حفر بريمى مستمر بقطر 60 سم عمق 18 م وتسليح 16 T 18 *12 م	450	1,150,000
برج الجيش بمحطة كهرباء دمياط الجديده	شركة أركون/الخرافى	تنفيذ خوازيق C.F.A بقطر 60 سم وعمق 34 م وتسليح 18 T 16 *24م	15	250,000
مدرسة دكتوره هاله بالفيوم	شركة عطا الله للمقاولات	تنفيذ خوازيق C.F.A بقطر 60 سم عمق 34 م وتسليح 16 T 10 *21م	66	400,000
مدرسة ميمونه بنى سويف	شركة عطا الله للمقاولات	تنفيذ خوازيق C.F.A بقطر 60سم عمق 30 م وتسليح 16 T 8 *21م	110	450,000

Compression load test method statement

1. Purpose

The aim of this Method Statement is to describe the tests procedure that will be performed on CFA cast-in-situ pile. The type and frequency of the tests will be as follows:

1) Static Load Test:

a) Compression load test for all preliminary piles.

b) Compression load test for 1/200 of working piles.

* Working piles to be tested will be selected by the Engineer.

2. Static Load Test

2.1 Scope

This test method covers the procedure for Compression Load Test of Piles to determine the maximum settlement of pile to an impact static load applied axially by a Kentledge at the head of the pile.

2.2 Compression load test

- The preliminary test piles, an additional 0.5 ٪ of the total working piles will be tested in compression.
- Static load test will be carried out in accordance with Project specification for CFA cast-in-place piles.
- The pile will be tested when the strength of the tested cubes taken from the pile concrete mix achieves the required compressive strength (conduct the test will be after receiving official request or at pile age 28 days).

2.3 Work methodology

A. Pile head preparation

- The pile head shall be formed to give a plane surface which is normal to the axis of the pile.
- Cast the test pile cap with dimension of; pile dia. + 200mm for width & length x 1m depth (reinforced with steel to be formed and casted by the main contractor).
- Plat form level must be compacted as well to carry the test loads & equipment. Compaction test certificate should be submitted before test arrangement.
- The reinforcement steel for all test piles should be extended to platform level.

B. Kentledge

- The platform supporting the Kentledge foundations, beams and other supporting structures shall not experience any differential settlement and has to be verified.
- The Kentledge consists mainly of Sand bags with suitable size, steel girders and beams.
- Sand bags with suitable size will be placed to support the main girders where the steel beams are then place on top of it.
- On top of the steel beams Sand bags with suitable size will be then stacked, loading.
- The total weight of the Sand bags with suitable size and the beams will be equivalent to the axial loading required.

C. Equipment for Applying Load and Measurement

- The equipment used for applying load shall consist of hydraulic jacks, will be fixed against the main girders to deliver the axial load to the test pile.
- A calibrated pressure gauge will be part of the hydraulic loading. The reading of pressure gauge will be recorded throughout the test.

D. Application of Test Load

- The test load will be applied by hydraulically jacking against Kentledge with the load being measured by tested and certified pressure gauge.

- The pile settlement will be recorded by means of 4 dial gauges registering against a reference beam, bearing on prepared flat surfaces fixed to the pile head and normal to the pile axis.
- The dial gauges shall be placed equidistant from the pile axis and from each other.
- The dial gauges shall enable readings to be made to an accuracy of at least 0.1 mm.
- Other construction activities and persons who are not involved in the testing process shall stay at a sufficient distance from the test to avoid disturbance to the measuring apparatus.

E. Test Procedure

Proof Load Test Procedure for working piles (Compression)

- The maximum load applied will be 1.5 times of working load for working piles. The loading and un-loadings will be carried out in stages as shown in (Table 1).
- Application of an increment of load will be maintained for not less than the period shown in the table below and until the rate of settlement is less than 0.25mm/hr and decreasing.
- Results will be recorded at each stage on site reading report.
- Upon completion of the test, results will be issued to the designer for verification.

Proof Load Test procedure for preliminary piles (Compression)

- Extended proof load test will be applied on preliminary piles, where test pile will be loaded up to 2 times of working load. The loading and un-loadings will be carried out in stages as shown in (Table 2).

Table 1 – Loading & Un-Loading stages for Working piles (150% working load)

Load	Minimum time of holding load
25%	2 h
50%	2 h
75%	2 h
100%	2 h
125%	2 h
150%	12 h /24 h*
125%	1 h
100%	1 h
75%	1 h
50%	1 h
25%	1 h
0	2 h

Table 2 – Loading & Un-Loading stages for Preliminary piles (200% working load)	
Load	**Minimum time of holding load**
25%	2 h
50%	2 h
75%	2 h
100%	2 h
125%	2 h
150%	2 h
175%	2 h
200%	12 h /24 h*
175%	1 h
150%	1 h
125%	1 h
100%	1 h
75%	1 h
50%	1 h
25%	1 h
0	2 h

3. General Site Requirements for Compression Test:

- **Preparation and Maintenance of Test Area (Main Contractor)**

 The area surrounding the test pile must be cleared of pile spoil, slurry and rubbish.

 A properly designed level platform of sufficient plan dimensions to support the testing equipment safely and with suitable access for operatives, transport vehicles. The working platform will be designed to withstand the loads applied by tracks or outriggers.

Equipment List

Item No.	Description	Type	Description	Model	Location	Photo	Remarks
1	Piling Rig Machine	Soilmec R6416	Pilling rig	2003	al mahallah		
2	Piling Rig Machine	Soilmec CM 50	Pilling rig	2005	Alexandaria		
3	Piling Rig Machine	Soilmec CM 70	Pilling rig	2003	Rasheed		
4	Concrete Pump	Putzmeister 1407	Concret Pump	2005	al mahallah		
5	Concrete Pump	Putzmeister 1409	Concret Pump	2007	Alexandaria		
6	Concrete Pump	Schwing 2800	Concret Pump	2005	Rasheed		
7	Vibro mHammer	Electrical	Vibro mHammer	3 Nos.	all sites		
8	Shewel loader	mutible models	Shewel loader	3 Nos.	all sites		
9	Concrete Agitator	Local manifacture	Concrete Agitator	3 Nos.	if needed		

Project Photos



Project Photos








HSE Plan

السلامة والصحة المهنية

❖ مقدمة:

تهتم شركة الدار بتطبيق قواعد السلامة والصحة المهنية فى جميع نشاطاتها حيث ن الأفراد العاملين بالشركة لهم كامل الاحترام الآدمي أولا كما ويعتبرون من أهم عاصر المنظومة في نجاح العمل.
لذا فالتطبيق الأمثل للقواعد يعود على الجميع بالفائدة والحماية من الأضرار التي قد تنشأ نتيجة العمل في مجال الانشاءات.
للشركة سياستها الخاصة في السلامة والصحة المهنية والتي تتماشي مع الاشتراطات العالمية وتتطابق مع القواعد المحلية لدولة جمهورية مصر العربية.

❖ سياسة السلامة والصحة المهنية

1- الالتزام بقوانين وتشريعات السلامة والصحة المهنية.
2- التحسين المستمر لأدائنا فى العمل ونشر الوعى الصحى بين العاملين للوصول لادنى حد من الحوادث حفاظا على سلامة الافراد والمنشآت.
3- عمل برامج للسلامة والصحة المهنية والمناسبة لتحقيق الاهداف المحددة لكل إدارة مع متابعتها أول بأول.
4- المبادرة بالحد أو منع الحوادث ال ناتجة من جميع الأنشطة والتعامل معها بالأسلوب الامثل وتعمل الشركة جاهدة على تنفيذ ماورد بهذه السياسة والتأكيد من وصولها لجميع العاملين وأتاحتها للعامة والجهات التى تتعامل معنا.

❖ خطة السلامة

- **الهدف من خطة السلامة**

هدف هذه الخطة هو توفير بيئة آمنة للعمل وحفظ الأصول بمنع حدوث مواقف خطرة مما يترتب عليه إيذاء الاشخاص أو إتلاف الأصول.

- **مسئوليات الأمان**

1) **م مدير الموقع:** يكون مسئول عن الامان بصفة عامة والتعامل مع المخالفين للتعليمات الامنية والصحية للموقع ويكون إيضا مسئولا عن توفير معدات سليمة وأدوات حماية شخصية بالعدد الكافى لتنفيذ الاعمال.
2) **مسئول المخازن:** التأكد من أن المعدات الموجودة بالمخزن فى وضع آمن للإستخدام وفحصها قبل إصدارها للموقع وأنها تعمل خلال الفترة العمرية لها والتأكد من أنه يتم تخزين المواد فى المخازن بطريقة أمنة وحفظها من حدوث التلف.

- **إجراءات السلامة**

1- يجب إرتداء حزام السلامة ضروريا على ارتفاع أكثر من 2 متر من الارضية مع تثبيت الحبل فى الارض بطريقة آمنة عندما يكون العمل على ارتفاعات عالية.
2- يتم تثبيت حزام السلامة على أعلى نقطة متاحة مع التأكد أنها غير تالفة.
3- يجب أرتداء الخوذ مع العلم بأن لون الخوذه يساعد على التعرف على الشخص سريعا فى حالة حدوث طوارىء.
4- التدخين ممنوع تماما داخل مناطق العمل فى الموقع.
5- يجب الحفاظ على منطقة العمل منظمة ونظيفة.
6- يجب عدم قضاء الحاجة إلا فى الاماكن المخصصة لذلك.
7- يسمح بتناول الطعام والراحة فى الاماكن المخصصة لذلك.
8- التخلص من الفضلات يكون فى سلة القمامة.
9- الاشخاص المسئولة والمؤهلة فقط بتشغيل الآلات وأى معدات آخرى.

10- يجب الا تستخدم الكابلات العارية او الوصلات غير الصحيحة ويتم التخلص من الكابلات التالفة فورا.
11- يجب معرفة مكان طفاية الحريق ومعرفة طريقة استخدامها ومراعاة عدم استخدام الماء او الطفايات الرغوية فى حريق الكهرباء.

❖ **إجراءات الطوارىء**

الحوادث:

فى حالة حدوث حادثة يقوم المسئول بالموقع بعمل مايلى:
1- إخبار الآخرين الذين يمكن أن يكونوا معرضين للخطر فى الحال.
2- رعاية المصاب بعد تقييم الموقف وتأمين المنطقة.
3- استدعاء الاسعاف فورا على رقم 123.

الحريق:

فى حالة إكتشاف حدوث الحريق يتم عمل الآتى:
1- تشغيل إنذار الحريق أو الإخبار أو الصياح.
2- بأقل إمكانية للتعرض للخطر للفرد إطفاء الحريق بإستخدام طفاية الحريق وطبقا لتعليمات استخدامها إزالة أى مواد مشتعلة بالقرب من منطقة حدوث الحريق أن أمكن.
3- فى حالة عدم السيطرة على الحريق :يتم التحرك بعيدا عن منطقة الخطر إلى منطقة آمنة والقرب من منطقة الخروج الآمنة.

❖ **خطة الامن بالموقع**

يجب مراعاة أخذ الاحتياطات الكافية والضرورية لتجنب حدوث السرقة أو التلف أو التخريب وذلك عن طريق: أن يكون الموقع مؤمن ومراقب على مدار 24 ساعة فى اليوم 7 أيام فى الاسبوع بواسطة أفراد الامن.

Quality Plan

- **Introduction:**

Al Dar have strict policy for work quality at all work stages, starting from pile setting out up to pile testing.

Each process/activity must be reviewed & checked by qualified person to insure for correct steps & mutuality with approved drawings & project specs.

Herby the following plan for each activity inspection:

1- Pile setting out:

Piles shall be accurately positioned using the modern instruments in surveying filed (Total station) to fix the pile location as per approved coordinates.

This process shall be done by qualified survivor.

2- Pile Excavation:

In accordance with the project specifications, the maximum horizontal deviation from the indicated location at the cut-off elevation for any pile shall not exceed as Egyptian code, measured in any direction.

Activity	Responsible	Reference	Means	Frequency
Axis	surveyor	Pile coordinates	Survey instrument	According to order
Excavation	engineer	IFC DWG	Tape measure	Each pile

3- Reinforcement:

Tests for determine physical and mechanical properties & mechanical test analysis using spectrum analysis of iron in laboratory as per project specs have to done at approved laboratory to confirm the iron actual properties.

Reinforcing steel shall be thoroughly cleaned of loose rust, dirt, grease, and coatings that would reduce or destroy the bond before installation inside pile.

Cages have to be inspected according to following check list:

Activity	Responsible	Reference	Means	Frequency
Bars numbers and diameter	Foremen	Pile coordinates	visually	Each cage
Total length	Engineer	IFC DWG	Tape measure	Each cage
Cage solidity	Engineer	N.A	visually	Each cage

4- Concreting:

Concrete mix design shall be performed & approved by Consultant as per project specs.

Concrete should be supplied from a central mixing plant, after apply tests on aggregates, cement, water and admixture according to the design mix of the project shall be performed as following:

Activity	Responsible	Reference	Means	Frequency
Deliver	Foremen	Project Specs	visually	Each truck
Truck mixing time	Engineer	Project Specs	Tape measure	Each truck
Consistency	Engineer	Mix design	Slump Cone test	Each truck
Compressive strength	Q.C engineer	Project Specs	LAB	6 cubs/100 QM

5- Important Control Tips for Execution Quality:

- The actual volume of concrete pile must be increased than the theoretical volume according to Egyptian code and it can be increased according to soil properties at field.
- Each pile shall be installed without interruption to the required minimum penetration depth unless prevented by unforeseen causes or as otherwise

directed by the engineer.

- Pile installation sequence shall be adjusted that no pile shall be installed in a distance of 3.0 m from previously installed pile unlooses Initial set or 6 hour is passed after concreting the previous pile.
- Daily report & pile data sheet shall be recorded for daily work.
- Pile load test & sonic integrity test shall be performed on pile according to Egyptian code & the specification of the project.


6- Additional Requirements for Continuous flight auger System (C.F.A.):

- Concrete must display during casting before getting out auger with minimum distance 2 meter.
- The rate of the auger withdraw shall be less than the pumping rate of concrete and the end of auger shall be kept in concrete during pumping concrete.

7- Additional Requirement for Bored Pile using Slurry system (Bentonite):

- Each batch of freshly Bentonite shall be sampled and tested before it shall be used in excavation (PH – viscosity).

Official Documents & Certificates

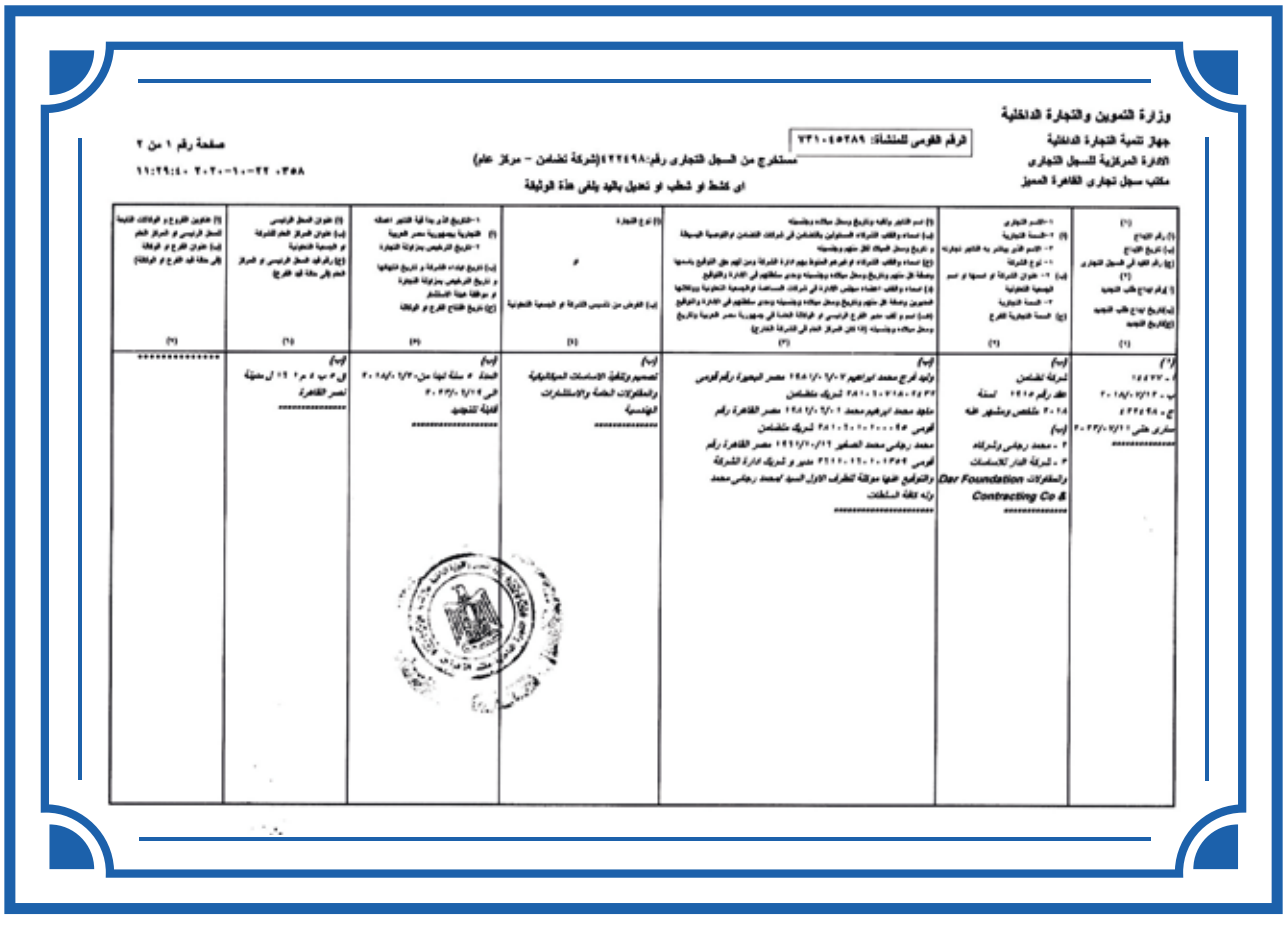

وزارة التموين والتجارة الداخلية
جهاز تنمية التجارة الداخلية
الادارة المركزية للسجل التجاري
مكتب سجل تجاري القاهرة الجديد

الرقم القومي للمنشأة: ٣٣١٠٤٥٢٨٩


مستخرج من السجل التجاري رقم:٤٢٢٤٩٨(شركة تضامن - مركز عام)

اى كشط او شطب او تحميل يلغي هذه الوثيقة

صفحة رقم ١ من ٢

٠٣٥٨ ٢٠٢٠-١٠-٢٢ ١١:٢٩:٤٠

(١)	(٢)	(٣)	(٤)	(٥)	(٦)	(٧)
(أ) رقم القيد (ب) تاريخ القيد (ج) رقم قيد في السجل التجاري (د) تاريخ بدء نشاط الشركة (هـ) تاريخ انتهاء الشركة (و) تاريخ طلب التعديل	(أ) اسم التاجر (ب) الاسم التجاري (ج) الاسم الذي يباشر به التاجر تجاريا (د) نوع الشركة (هـ) عنوان الشركة او اسمها او اسم الجمعية التعاونية (و) اسماء الشركاء المتضامنين (ز) اسماء الشركاء الموصين	(أ) اسم التاجر وكافة بياناته وجنسيته (ب) اسماء وكافة بيانات الشركاء المتضامنين في شركات التضامن والتوصية البسيطة و تاريخ ومحل ميلاد كل منهم وجنسيته (ج) اسماء وكافة بيانات الشركاء او اعرض المشتركة بهم ادارة الشركة وحق توقيعهم عن الشركة وصفة كل منهم وتاريخ ومحل ميلاد كل منهم وجنسيته (د) اسماء وكافة بيانات اعضاء مجلس الادارة في شركات المساهمة والجمعية التعاونية وبيان صفاتهم ومحل اقامة كل منهم وتاريخ ومحل ميلاده وجنسيته وحدود سلطاتهم في الادارة والتوقيع (هـ) اسم و لقب مدير الفرع الرئيسي او الوكالة الخاصة في جمهورية مصر العربية وتاريخ ومحل ميلاده وجنسيته (إذا كان الشريك العام في الشركة اجنبي)	(أ) نوع النشاط (ب) الغرض من تاسيس الشركة او الجمعية التعاونية	(أ) تاريخ قرار او اذن التسجيل بصفة (أ) التجارية بجمهورية مصر العربية (ب) تاريخ القرار الرئيسي بمزاولة التجارة (ب) تاريخ بدء الشركة و تاريخ انتهائها و تاريخ القرار الرئيسي بمزاولة التجارة و موافقة هيئة الاستثمار (ج) تاريخ افتتاح الفرع او الوكالة	(أ) عناوين الفروع و الوكالات التابعة للسجل الرئيسي و اسم كل منها (ب) عنوان الفرع او الوكالة (إلى محافظة الفرع او الوكالة)	
(أ) ١٤٤٣٣٠ ٢٠١٨/٠٧/١٢ ٤٢٢٤٩٨ ٢٠٢٣/٠٧/١١ **********	(أ) شركة تضامن مقر رقم ٢٥١٥ لسنة ٢٠١٨ بلقاس وبشهر فلة (ب) ١ - محمد رجائي وشركاه ٢ - شركة النار للاستثمارات والمقاولات Dar Foundation Contracting Co & **********	(أ) شركة تضامن مقر رقم ٢٥١٥ لسنة ٢٠١٨ بلقاس وبشهر فلة (ب) ١ - محمد رجائي وشركاه ٢ - شركة النار للاستثمارات والمقاولات Dar Foundation Contracting Co & ********** (ب) وليد فرج محمد ابراهيم ٢٨٨١٠٧٠٣٠١٠٢٥ مصر الجديدة رقم قومي ٢٨٨١٠٧٠٣٠١٠٢٥ شريك متضامن ماجد محمد ابرهيم محمد ٢٨٨١٠٩٠١٠١٠٢٥ مصر القاهرة رقم قومي ٢٨٨١٠٩٠١٠٠٠٠٥ شريك متضامن محمد رجائي محمد الصغير ١٩٩١٠٧٠٢١٢٠١٠ مصر القاهرة رقم قومي ٢٩١١٠١٢٠١٠٣٥٢ مدير و شريك ادارة الشركة والتوقيع عنها موثقة لطرف الاول السيد /محمد رجائي محمد وله كافة السلطات **********	(أ) تصوير وتكلفة الاستمارات المكاتبية والمطبوعات الخاصة والاستشارات الهندسية **********	(أ) المدة ٥ سنة ابتدا من ٢٠١٨/٠٧/٢٠ الى ٢٠٢٣/٠٧/١٩ (ب) الفاية للتجديد **********	(أ) ش ٥ ب ٥ م ٢ ع ١٢ ل مدينة نصر القاهرة **********	

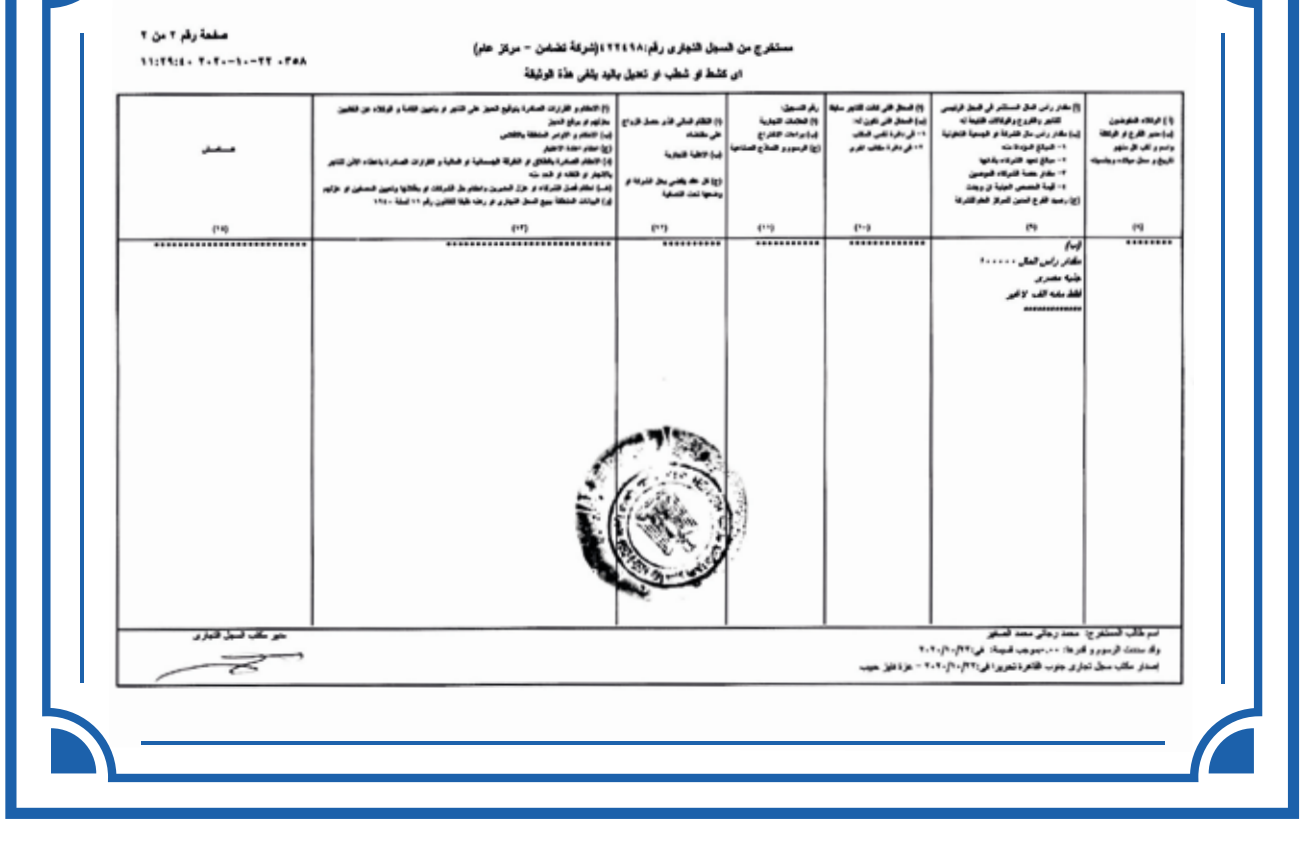

صفحة رقم ٢ من ٢

٠٣٥٨ ٢٠٢٠-١٠-٢٢ ١١:٢٩:٤٠

مستخرج من السجل التجاري رقم:٤٢٢٤٩٨(شركة تضامن - مركز عام)

اى كشط او شطب او تحميل يلغي هذه الوثيقة

(١)	(٩)	(١٠)	(١١)	(١٢)	(١٣)	(١٤)
(أ) الشركاء المتضامنين (ب) محل الفرع او الوكالة وتاريخ و رقم قيد كل منهم	(أ) مقدار راس المال المسجل في السجل الرئيسي (ب) مقدار راس مال الشركة او الجمعية التعاونية ١ - المبالغ المدفوعة منه ٢ - مبالغ تعهد الشركاء بدفعها ٣ - مقدار حصة الشركاء الموصين ٤ - قيمة المقصص العينية ان وجدت (ج) رصيد الفرع المحين للسجل العام للشركة	(أ) السجل الذي قيدت فيه سابقا (ب) السجل الذي تكون له ١ - في دائرة مكتب القاهرة ٢ - في دائرة مكتب الفرع	رقم السجل (أ) المحلات التجارية (ب) براءات الاختراع (ج) الرسوم والنماذج الصناعية	(أ) النظام الداخلي الذي يحمل الترخيص على مكتمله (ب) الجهة التجارية (ج) اذن الجهة التجارية او الجمعية التعاونية	(أ) الاحكام و القرارات الصادرة بتوقيع الحجز على التاجر و بتعيين القائمة و الوكلاء عن الغائبين (ب) الاحكام و الامر الصادرة بالحكم (ج) احكام اعادة الاعتبار (د) الاحكام الصادرة بالافلاس و الشركة الجماعية و التوصية و القرارات الصادرة باعفاء المأذون التاجر بالافلاس و الصلح و عدد بنه (هـ) نظام فصل الشركاء و حل الشريكين واعلام حل الشركات و بطلانها وتعيين المصفين و عزلهم (و) البيانات المتعلقة بيوع السجل التجاري و رهن طبقا للقانون رقم ١١ لسنة ١٩٤٠	ملاحظات
**********	(ب) مقدار راس المال ٢٠٠٠٠٠ جنيه مصري فقط مئتين الف لاغير **********	**********	**********	**********	**********	**********

اسم كاتب المستخرج: محمد رجائي محمد الصغير
وقد سددت الرسوم و قدرها: ٠٠ جنيهات فقط في ٢٠٢٠/١٠/٢٢
اصدار مكتب سجل تجاري جنوب القاهرة تحريرا في ٢٠٢٠/١٠/٢٢ - جزء فيلا حبيب

مدير مكتب السجل التجاري

Gamma
For Inspection & Testing

جاما
للتفتيش والاختبارات

ORIGINAL

Ref. No. : 9106 /GC/12/20
Date : 9/12/2020

Inspection Certificate

Client : Dar FOUNJATIONS CO .
Project : Egypt Spinning and Weaving Factory .
Equipment Inspected : Drilling Machine.
Type : SOILMCO Model : R-416
Ser No. : 506-087-087
Mass : 32800 kg
Date & Place of inspection : 8/12/2020 , at Client's works , EL-Mahalla .
Applicable reference : - ISO 4310

Inspection Procedure Results

Visual Check	
Test	Results
General view	Ok
Safety utensils	"
Cabin	"
Crawler mechanism	"
Crawler treads	"
Wire robes	"
Tubular Boom	"

Visual Check	
Test	Results
Engine	Ok
Hydraulic system	"
Brakes	"
Alarm devices	"
Control system	"
Light	"
Structure	"

- Equipment as brakes, hydraulic and lifting gear were found acceptable and in a good condition during the tests.

Conclusion:

On the basis of our inspection procedure finding the Piling Rig Type : SOILMCO , Model : R-416 , Ser. No. : 506-087-087 , by this condition is satisfactory for the purpose of piling work. Piling Rig is due for re-inspectio on 7/6/2021 , or after any major repairs, provided that the regular maintenance had taken place.

Tested by
Eng . Kareem Ismail
Heba Kh

Director
Eng. Ramadan Atiya

(Make Sure From The Sign Of Golden ... تأكد من وجود ... الذهبية)

المركز الرئيسى : ٦ شارع أمين خيرت الغندور - ميامى - الإسكندرية
تليفاكس : ٠٣/٥٤٠٤٤٧٣ موبايل : ٠١٢٢٢٧٤٢٧٩٩
Head Office : 6 Amin Khairat El Ghandour St. Miami - Alexandria Telefax : 03/5404473 Mob. : 01222742799



فرع: القاهرة

0052934

رقم العضوية ١٧٢٢٣

اسم المقاول / الشركة: الدار للاساسات والمقاولات DAR FOUNDATION&CONTRACTING CO - محمد رجائي وشركاه

نوع المنشأة : تضامن

تاريخ القيد بالأتحاد : ٢٠١٨/١١/٠٥

العنوان : ق ٥ ب ٤ م ١ ش ١٦ ل

مركز / قسم : مدينة نصر ثان

المحافظة : القاهره

الأعمال التي صنف فيها المقاول

الشعبة	التخصصات	الفئة
الأولى	أعمال المباني (مقاول)	السابعه
	الأساسات	السادسه

أستخرجت هذه البيانات من واقع بطاقة الإتحاد مسلسل (١١٥٧٥) الصادرة في ٢٠٢٠/٠٩/٢٢

والسارية حتى: ٢٠٢١/٠٩/٢١

تحريرا في ٢٠٢٠/١٠/٠٧

شئون العضوية

الأمين العام

EFCBC

الاتحاد المصري للمقاولين والتشييد والبناء

شهادة بيانات مؤقتة

محاسب هشام يسري



جمهورية مصر العربية

وزارة المالية

مصلحة الضرائب المصرية

شركه الدار للاساسات والمقاولات

محمد رجائي محمد الصغير وشركاه

ق ٥ ب ٤ م ١ ش ١٦ ل مدينه نصر

شركه تضامن

مدينة نصر ثان/٠٠٠

تصميم اساسات مقاولات استشارات

٢٤٣٠٥٠٠٢٩٦٦٠٤١

٢٠١٨/٠٧/١٢ ٢٠٢٣/٠٧/١١ ٧٣١٠٤٥٠٢٨٩

29624762456464 7




رخصة تشغيل معدة
حـــفـــار
الاســـــم
مسعود محمد عبد الوهاب
رقـــم البطاقـــة
٢٨٠١٢٢٠١٨٠٣٩٧١
رقم مسلسل الرخصة
٢٠٢٠/٢٤٢
تـــاريخ الاصـــدار
٢٠٢٠.١.٢٢
تـــاريخ الانتهـــاء
٢٠٢٥/١٠/٢١
شئون المنقبين
مدير عام المركز


رخصة تشغيل معدة
لـــــودر
الاســـــم
محمد على يحي جاد الله
رقـــم البطاقـــة
٢٩٣٠٢٠١١٥٠٩٣٥١
رقم مسلسل الرخصة
٢٠٢٠/١٤٢
تـــاريخ الاصـــدار
٢٠٢٠.١.٢٢
تـــاريخ الانتهـــاء
٢٠٢٥/١٠/٢١
شئون المنقبين
مدير عام المركز

AL DAR
FOUNDATIONS AND CONTRACTING CO.
الدار للأساسات و المقاولات

Darak from Concept to Creation

(+2) 0222688138
(+2) 01098146046

www.aldarfoundations.com
info@aldarfoundations.com

Head office : Cairo - Sheraton - Dr. Soliman El-Tamawy Street, Building No. 15 Flat 101